

CERTIFICATE OF ANALYSIS FOR

CERTIFIED REFERENCE MATERIAL
OREAS 282b

Refractory High-Grade Gold Ore

(Leeville/Deep Post Mines, Carlin Trend, Nevada, USA)



Accredited for compliance with ISO 17034



COA-1795-OREAS 282b-R0
BUP-70-10-01 Ver:2.0

7-November-2025

Table 1. Certified Values, Uncertainty & Tolerance Intervals in OREAS 282b.

Constituent	Certified Value	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
Pb Fire Assay					
Au, Gold (ppm)	15.02	14.90	15.14	14.98*	15.05*
Bi Fire Assay					
Au, Gold (ppm)	15.17	15.02	15.33	15.15*	15.20*
PhotonAssay™ (recommended gross mass 445-475 g)					
Au, Gold (ppm)	15.36	15.27	15.45	15.35*	15.37*
Infrared Combustion					
C, Carbon (wt.%)	2.00	1.97	2.04	1.98	2.02
S, Sulphur (wt.%)	2.23	2.18	2.28	2.20	2.26
4-Acid Digestion					
Ag, Silver (ppm)	2.35	2.21	2.49	2.26	2.44
Al, Aluminium (wt.%)	3.24	3.15	3.33	3.16	3.32
As, Arsenic (wt.%)	0.507	0.490	0.523	0.499	0.515
Be, Beryllium (ppm)	0.77	0.70	0.83	0.74	0.79
Bi, Bismuth (ppm)	0.33	0.31	0.35	0.31	0.34
Ca, Calcium (wt.%)	3.15	3.06	3.25	3.09	3.22
Cd, Cadmium (ppm)	1.85	1.74	1.96	1.77	1.93
Ce, Cerium (ppm)	38.1	36.3	39.8	36.9	39.2
Co, Cobalt (ppm)	6.47	6.09	6.85	6.32	6.61
Cr, Chromium (ppm)	54	49	58	52	56
Cs, Caesium (ppm)	6.22	5.91	6.54	6.02	6.43
Cu, Copper (ppm)	33.3	31.2	35.4	31.6	35.0
Dy, Dysprosium (ppm)	2.20	2.04	2.36	2.09	2.30
Er, Erbium (ppm)	1.21	1.10	1.32	1.14	1.27
Eu, Europium (ppm)	0.75	0.63	0.87	0.69	0.81
Fe, Iron (wt.%)	2.44	2.38	2.51	2.40	2.48
Ga, Gallium (ppm)	8.60	8.18	9.01	8.37	8.82
Gd, Gadolinium (ppm)	2.72	2.54	2.89	2.55	2.88
Hf, Hafnium (ppm)	1.44	1.31	1.56	1.37	1.50
Ho, Holmium (ppm)	0.42	0.39	0.45	0.40	0.44
In, Indium (ppm)	0.052	0.044	0.061	0.048	0.057
K, Potassium (wt.%)	1.11	1.07	1.15	1.08	1.13
La, Lanthanum (ppm)	21.7	20.5	22.9	21.1	22.3
Li, Lithium (ppm)	32.5	31.3	33.7	31.6	33.4
Lu, Lutetium (ppm)	0.16	0.15	0.18	IND	IND
Mg, Magnesium (wt.%)	0.919	0.891	0.946	0.898	0.940
Mn, Manganese (wt.%)	0.016	0.015	0.016	0.015	0.016
Mo, Molybdenum (ppm)	21.4	20.5	22.3	21.0	21.9
Na, Sodium (wt.%)	0.031	0.028	0.033	0.029	0.033
Nb, Niobium (ppm)	8.59	8.09	9.09	8.30	8.89

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt. % (weight per cent) \equiv % (mass fraction).

*Gold Tolerance Limits for typical 30 g lead/bismuth fire assay and 445-475 g PhotonAssay are determined from 20 x 85 mg INAA results and the Sampling Constant (Ingamells & Switzer, 1973).

Note: intervals may appear asymmetric due to rounding.

IND = indeterminate (due to limited reading resolution of the methods employed).

Table 1 continued.

Constituent	Certified Value	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
4-Acid Digestion continued					
Nd, Neodymium (ppm)	18.0	16.9	19.1	17.5	18.5
Ni, Nickel (ppm)	41.4	39.6	43.1	40.4	42.3
P, Phosphorus (wt.%)	0.058	0.057	0.060	0.057	0.060
Pb, Lead (ppm)	18.2	17.1	19.3	17.6	18.9
Pr, Praseodymium (ppm)	4.84	4.60	5.07	4.69	4.98
Rb, Rubidium (ppm)	60	57	63	59	62
Re, Rhenium (ppm)	0.029	0.025	0.033	0.026	0.032
S, Sulphur (wt.%)	2.19	2.13	2.24	2.15	2.22
Sb, Antimony (ppm)	167	161	174	163	171
Sc, Scandium (ppm)	4.76	4.54	4.98	4.60	4.91
Se, Selenium (ppm)	2.41	1.85	2.97	1.94	2.88
Sm, Samarium (ppm)	3.22	3.07	3.38	3.07	3.37
Sn, Tin (ppm)	2.37	2.18	2.56	2.24	2.50
Sr, Strontium (ppm)	47.8	45.7	49.8	46.7	48.8
Ta, Tantalum (ppm)	0.41	0.36	0.45	0.38	0.43
Tb, Terbium (ppm)	0.38	0.35	0.41	0.36	0.40
Te, Tellurium (ppm)	1.94	1.81	2.07	1.80	2.08
Th, Thorium (ppm)	5.25	4.91	5.58	5.05	5.45
Ti, Titanium (wt.%)	0.169	0.162	0.177	0.165	0.173
Tl, Thallium (ppm)	45.6	43.3	47.9	44.4	46.8
Tm, Thulium (ppm)	0.16	0.13	0.18	IND	IND
U, Uranium (ppm)	5.07	4.81	5.32	4.92	5.21
V, Vanadium (ppm)	186	178	193	182	189
W, Tungsten (ppm)	63	60	66	62	65
Y, Yttrium (ppm)	13.5	12.9	14.2	13.2	13.9
Yb, Ytterbium (ppm)	1.08	1.00	1.16	1.01	1.16
Zn, Zinc (ppm)	170	165	175	167	173
Zr, Zirconium (ppm)	49.9	47.5	52.4	48.0	51.8
Aqua Regia Digestion					
Ag, Silver (ppm)	2.32	2.21	2.44	2.24	2.41
Al, Aluminium (wt.%)	0.684	0.644	0.725	0.664	0.705
As, Arsenic (wt.%)	0.500	0.487	0.514	0.493	0.507
Au, Gold (ppm)	5.52	4.97	6.08	5.20	5.84
Be, Beryllium (ppm)	0.29	0.25	0.33	0.26	0.32
Bi, Bismuth (ppm)	0.30	0.28	0.32	0.29	0.32
Ca, Calcium (wt.%)	3.10	2.99	3.21	3.04	3.17
Cd, Cadmium (ppm)	1.85	1.74	1.95	1.78	1.91
Ce, Cerium (ppm)	22.8	21.8	23.8	22.3	23.3
Co, Cobalt (ppm)	6.38	6.11	6.64	6.21	6.54
Cr, Chromium (ppm)	25.6	24.4	26.9	24.7	26.6
Cs, Caesium (ppm)	2.74	2.57	2.91	2.65	2.83

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt. % (weight per cent) \equiv % (mass fraction).

Note: intervals may appear asymmetric due to rounding.

IND = indeterminate (due to limited reading resolution of the methods employed).

Table 1 continued.

Constituent	Certified Value	95% Expanded Uncertainty		95% Tolerance Limits	
		Low	High	Low	High
Aqua Regia Digestion continued					
Cu, Copper (ppm)	32.4	30.7	34.1	31.5	33.4
Fe, Iron (wt.%)	2.37	2.30	2.44	2.33	2.41
Ga, Gallium (ppm)	2.17	1.99	2.36	2.05	2.30
Hf, Hafnium (ppm)	0.17	0.15	0.18	IND	IND
Hg, Mercury (ppm)	34.5	32.8	36.2	33.6	35.4
In, Indium (ppm)	0.045	0.041	0.049	0.042	0.048
K, Potassium (wt.%)	0.247	0.234	0.260	0.239	0.255
La, Lanthanum (ppm)	12.2	11.7	12.7	11.9	12.5
Li, Lithium (ppm)	4.22	3.76	4.68	4.05	4.40
Mg, Magnesium (wt.%)	0.813	0.785	0.842	0.799	0.828
Mn, Manganese (wt.%)	0.016	0.015	0.016	0.015	0.016
Mo, Molybdenum (ppm)	21.1	20.3	21.9	20.6	21.6
Ni, Nickel (ppm)	40.1	38.3	41.9	39.2	41.0
P, Phosphorus (wt.%)	0.055	0.053	0.058	0.054	0.057
Pb, Lead (ppm)	17.2	16.4	18.0	16.7	17.7
Rb, Rubidium (ppm)	14.1	13.2	14.9	13.6	14.5
Re, Rhenium (ppm)	0.028	0.026	0.031	0.026	0.031
S, Sulphur (wt.%)	2.20	2.14	2.25	2.15	2.24
Sb, Antimony (ppm)	125	119	131	121	129
Sc, Scandium (ppm)	2.63	2.50	2.75	2.51	2.74
Se, Selenium (ppm)	2.44	2.06	2.83	2.21	2.68
Sn, Tin (ppm)	1.47	1.36	1.58	1.38	1.56
Sr, Strontium (ppm)	28.8	27.7	30.0	28.1	29.6
Ta, Tantalum (ppm)	< 0.01	IND	IND	IND	IND
Tb, Terbium (ppm)	0.30	0.27	0.32	0.28	0.31
Te, Tellurium (ppm)	1.89	1.75	2.03	1.77	2.01
Th, Thorium (ppm)	3.72	3.50	3.94	3.61	3.83
Ti, Titanium (wt.%)	< 0.005	IND	IND	IND	IND
Tl, Thallium (ppm)	40.9	38.9	42.8	39.9	41.8
U, Uranium (ppm)	3.26	3.11	3.42	3.18	3.34
V, Vanadium (ppm)	83	78	88	81	84
W, Tungsten (ppm)	30.3	28.2	32.4	29.4	31.2
Y, Yttrium (ppm)	8.45	8.08	8.82	8.29	8.61
Yb, Ytterbium (ppm)	0.50	0.48	0.53	IND	IND
Zn, Zinc (ppm)	167	162	172	164	169
Zr, Zirconium (ppm)	5.72	5.30	6.13	5.46	5.98

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt.% (weight per cent) \equiv % (mass fraction).

Note: intervals may appear asymmetric due to rounding.

IND = indeterminate (due to limited reading resolution of the methods employed. For practical purposes the 95% Expanded Uncertainty can be set between zero and a two times multiple of the upper bound/non-detect limit value).

Table 2. Indicative Values for OREAS 282b.

Constituent	Unit	Value	Constituent	Unit	Value	Constituent	Unit	Value
4-Acid Digestion								
B	ppm	6.25	Ge	ppm	0.18			
Ba	ppm	956	Hg	ppm	27.6			
Aqua Regia Digestion								
B	ppm	12.5	Ge	ppm	0.072	Pd	ppb	< 10
Ba	ppm	65	Ho	ppm	0.28	Pr	ppm	2.69
Dy	ppm	1.50	Lu	ppm	0.073	Pt	ppb	< 5
Er	ppm	0.65	Na	wt.%	0.012	Sm	ppm	2.03
Eu	ppm	0.50	Nb	ppm	0.37	Tm	ppm	0.068
Gd	ppm	1.78	Nd	ppm	9.91			
Borate Fusion XRF								
Al ₂ O ₃	wt.%	6.19	MgO	wt.%	1.64	S	wt.%	2.22
CaO	wt.%	4.42	MnO	wt.%	0.015	SiO ₂	wt.%	72.38
Fe ₂ O ₃	wt.%	3.49	Na ₂ O	wt.%	0.075	TiO ₂	wt.%	0.315
K ₂ O	wt.%	1.32	P ₂ O ₅	wt.%	0.133			
Thermogravimetry								
LOI ¹⁰⁰⁰	wt.%	6.91						
Laser Ablation ICP-MS								
Ag	ppm	2.55	Hf	ppm	2.56	Sn	ppm	3.10
As	wt.%	0.507	Ho	ppm	0.50	Sr	ppm	46.6
Ba	ppm	1710	In	ppm	< 0.05	Ta	ppm	0.53
Be	ppm	0.80	La	ppm	23.5	Tb	ppm	0.42
Bi	ppm	0.31	Lu	ppm	0.19	Te	ppm	2.00
Cd	ppm	2.05	Mn	wt.%	0.016	Th	ppm	5.60
Ce	ppm	37.0	Mo	ppm	20.6	Ti	wt.%	0.181
Co	ppm	6.40	Nb	ppm	9.10	Tl	ppm	94
Cr	ppm	55	Nd	ppm	18.8	Tm	ppm	0.20
Cs	ppm	6.15	Ni	ppm	41.0	U	ppm	5.10
Cu	ppm	33.0	Pb	ppm	18.0	V	ppm	188
Dy	ppm	2.42	Pr	ppm	5.14	W	ppm	64
Er	ppm	1.38	Rb	ppm	58	Y	ppm	15.2
Eu	ppm	0.70	Re	ppm	0.040	Yb	ppm	1.33
Ga	ppm	8.15	Sb	ppm	168	Zn	ppm	185
Gd	ppm	2.81	Sc	ppm	4.65	Zr	ppm	94
Ge	ppm	0.80	Sm	ppm	3.39			

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt.% (weight per cent) \equiv % (mass fraction).

Note: the number of significant figures reported is not a reflection of the level of certainty of stated values. They are instead an artefact of ORE's in-house CRM-specific LIMS.

TABLE OF CONTENTS

INTRODUCTION	7
SOURCE MATERIAL.....	7
COMMINUTION AND HOMOGENISATION PROCEDURES	8
PHYSICAL PROPERTIES	8
MINERALOGY	8
ANALYTICAL PROGRAM.....	9
STATISTICAL ANALYSIS.....	9
Certified Values and their uncertainty intervals	9
Indicative (uncertified) values.....	10
Homogeneity Evaluation	10
PERFORMANCE GATES	12
PARTICIPATING LABORATORIES.....	15
PREPARER AND SUPPLIER	19
METROLOGICAL TRACEABILITY	19
COMMUTABILITY	20
INTENDED USE	20
MINIMUM SAMPLE SIZE	20
PERIOD OF VALIDITY & STORAGE INSTRUCTIONS.....	21
INSTRUCTIONS FOR HANDLING & CORRECT USE	21
LEGAL NOTICE	22
DOCUMENT HISTORY	23
CERTIFYING OFFICER.....	23
QMS CERTIFICATION	23
REFERENCES	23

LIST OF TABLES

Table 1. Certified Values, Uncertainty & Tolerance Intervals in OREAS 282b.....	2
Table 2. Indicative Values for OREAS 282b.....	5
Table 3. Physical properties of OREAS 282b	8
Table 4. Indicative mineralogy of OREAS 282b by semi-quantitative XRD analysis.....	8
Table 5. Neutron Activation Analysis of Au on 20 x 85mg subsamples	11
Table 6. Performance Gates for OREAS 282b.	12

LIST OF FIGURES

Figure 1. Au by Pb Fire Assay in OREAS 282b	17
Figure 2. Au by PhotonAssay™ in OREAS 282b.....	18

INTRODUCTION

OREAS reference materials are intended to provide a low-cost method of evaluating and improving the quality of analysis of geological samples. To the geologist they provide a means of implementing quality control in analytical data sets generated in exploration from the grass roots level through to prospect evaluation, and in grade control at mining operations. To the analyst they provide an effective means of calibrating analytical equipment, assessing new techniques and routinely monitoring in-house procedures. OREAS reference materials enable users to successfully achieve process control of these tasks because the observed variance from repeated analysis has its origin almost exclusively in the analytical process rather than the reference material itself. In evaluating laboratory performance with this CRM, the section headed 'Instructions for handling and correct use' should be read carefully.

Table 1 presents the certified values together with their associated 95 % expanded uncertainty and tolerance intervals. Table 2 provides indicative values, including major and trace element characterisation, Table 3 lists indicative physical properties, while Table 4 reports indicative mineralogy determined by semi-quantitative XRD analysis. Gold homogeneity, assessed by INAA, is shown in Table 5 and is further demonstrated through a nested ANOVA (see *Homogeneity Evaluation* section). Finally, Table 6 presents the performance gate intervals for all certified values.

Tabulated results of all analytes together with uncorrected means, medians, standard deviations, relative standard deviations and per cent deviation of laboratory means from the corrected mean of means (PDM³) are presented in the detailed certification data for this CRM (**OREAS 282b-DataPack.1.0.251107_163505.xlsx**). The certified values and uncertainties in this Certificate are the sole authoritative figures. Any additional significant figures in the DataPack are provided for reference only and do not affect the certified results.

Results are also presented in scatter plots for Au by Pb fire assay and Au by PhotonAssay™ in Figures 1 to 2 respectively, together with $\pm 3\text{SD}$ (magenta) and $\pm 5\%$ (yellow) control lines and certified value (green line). Accepted individual results are coloured blue and individual and dataset outliers are identified in red and violet, respectively.

SOURCE MATERIAL

OREAS 282b was prepared from a blend of gold ores and barren materials comprising quartz, black slate, pyrite, white marble, dolomite, and graphite. The ores were sourced from both the Leeville and Deep Post Mines, located near the western crest of the Tuscarora Mountains, approximately 20 miles northwest of Carlin, Nevada, USA. Both mines are underground, high-grade refractory gold deposits on the Carlin Trend. The ores were provided by Nevada Gold Mines, operated under Barrick's management. The deposits are hosted in carbonate rocks within the Carlin Trend, where gold occurs as fine-grained, disseminated, and structurally controlled Carlin-type mineralisation, commonly associated with pyrite and arsenian pyrite in decalcified and weakly to moderately silicified zones.

The ores are double-refractory, containing both sulphidic sulphur and carbonaceous (organic) matter. Gold occurs as submicroscopic inclusions within sulphide minerals and is also adsorbed onto organic carbon surfaces, which can exhibit strong preg-robbing behaviour during cyanidation.

COMMINUTION AND HOMOGENISATION PROCEDURES

The materials constituting OREAS 282b was prepared in the following manner:

- Drying of ores and barren materials to constant mass at 105° C;
- Crushing and multi-stage milling of the barren materials to >98 % minus 75 microns;
- Crushing and multi-stage milling of the ores to 100 % minus 30 microns;
- Blending the ores and barren materials in appropriate proportions to achieve desired grades;
- Homogenisation using OREAS' novel processing technologies;
- Packaging in 60 g units in laminated foil pouches.

PHYSICAL PROPERTIES

OREAS 282b was tested at ORE Research & Exploration Pty Ltd's onsite facility for various physical properties. Table 3 presents these findings that should be used for informational purposes only.

Table 3. Physical properties of OREAS 282b.

Bulk Density (kg/m ³)	Moisture (wt.%)	Munsell Notation [‡]	Munsell Color [‡]
505	0.49	N5	Medium Gray

[‡]The Munsell Rock Color Chart helps geologists and archeologists communicate with colour more effectively by cross-referencing ISCC-NBS colour names with unique Munsell alpha-numeric colour notations for rock colour samples.

MINERALOGY

The semi-quantitative XRD results shown in Table 4 below were undertaken by ALS Metallurgy in Balcatta, Western Australia. The results have been normalised to 100 % and represent the relative proportion of crystalline material. Totals greater or less than 100 % are due to rounding errors. Some amorphous material may be present. 'Clay mineral' appears to be mainly illite. 'Kandite group' appears to be mainly kaolinite and dickite.

Table 4. Indicative mineralogy of OREAS 282b by semi-quantitative XRD analysis.

Mineral / Mineral Group	% (mass ratio)
Clay mineral	< 1
Chlorite	< 1
Kandite group	3
Serpentine	< 1
Annite - biotite - phlogopite	2
Muscovite	5
K-feldspar and/or rutile	< 1
Quartz	64
Calcite	3
Dolomite - ankerite	17
Pyrite	3
Marcasite	1
Arsenopyrite	1
Realgar	< 1
Apatite group	< 1

ANALYTICAL PROGRAM

Fifty-nine commercial analytical laboratories participated in the program to certify the elements reported in Table 1. The following methods were employed:

- Gold by Pb collection fire assay (25-50g charge weight) with AAS (20 laboratories), gravimetric (12 laboratories) and ICP-OES (6 laboratories) finish;
- Gold by Bi collection fire assay (30 g charge weight) with AAS finish (3 submissions of 5 samples at 1 laboratory);
- Gold by PhotonAssay™ (protocol PAAU02) with recommended gross fill mass of 445 -475 g (21 laboratories);
- Total C and S by IR combustion furnace (up to 34 laboratories depending on the element);
- Full ICP-OES and ICP-MS elemental suites by 4-acid ($\text{HNO}_3\text{-HF-HClO}_4\text{-HCl}$) digestion (up to 31 laboratories depending on the element);
- Full ICP-OES and ICP-MS elemental suites by aqua regia digestion (up to 31 laboratories depending on the element).

For the round robin program, twelve 5 kg test units were collected at predetermined intervals during the bagging stage, immediately after homogenisation. With the exception of the Au by Bi collection fire assay and Au by PhotonAssay™ programs, each participating laboratory received six test portions. The samples received by each laboratory were obtained by taking a 110 g sample from six different 5 kg test units to maximise representation (i.e., from either the odd or even sampling (lot) intervals).

For the Bi collection fire assay program, three separate submissions of five 110g samples were sent to one laboratory. Each submission was sent a week apart to make the program more robust by incorporating batch-to-batch variation in the certification data.

For the PhotonAssay program, each of the participating laboratories received three 500 g samples. Laboratories were instructed to prepare PhotonAssay jars from each sample and assay each jar in duplicate, generating a total of six results per laboratory. The recommended gross fill mass for each candidate reference material was specified to participants to ensure consistency in measurement conditions.

The 20 individual INAA results upon which much of the homogeneity evaluation is based, included paired 10 g samples taken from 10 different sampling units. This format enabled a nested ANOVA treatment of the INAA results to evaluate homogeneity (see 'Homogeneity Evaluation' section below).

STATISTICAL ANALYSIS

Certified Values and their uncertainty intervals (Table 1) have been determined for each analyte following removal of individual, laboratory dataset (batch) and 3SD outliers (single iteration). Outlier evaluation was conducted in accordance with ISO 17034:2017 and ISO 33405:2024. While formal statistical tests were applied, professional statistical judgment was also exercised in determining the validity of potential outliers. Assessment of systematic bias and performance using independent control materials (CRMs) was incorporated to ensure compliance with the referenced standards and to establish metrological traceability of the certified values.

95% Expanded Uncertainty provides a 95 % probability that the true value of the analyte under consideration lies between the upper and lower limits and is calculated according to

the method outlined in [5] and [15]. All known or suspected sources of bias have been investigated or taken into account.

Indicative (uncertified) values (Table 2) are present where the number of laboratories reporting a particular analyte is insufficient (< 5) to support certification or where interlaboratory consensus is poor. This data is intended for 'informational purposes' only.

Standard Deviation intervals (see Table 6, 'Performance Gates') provide an indication of a level of performance that might reasonably be expected from a laboratory being monitored by this CRM in a QA/QC program. They take into account errors attributable to measurement uncertainty and CRM variability. For an effective CRM the contribution of the latter should be negligible in comparison to measurement errors. The Standard Deviation values include all sources of measurement uncertainty: between-lab variance, within-run variance (precision errors) and CRM variability.

The SD for each analyte's certified value is calculated from the same filtered data set used to determine the certified value, i.e., after removal of all individual, lab dataset (batch) and 3SD outliers (single iteration). These outliers can only be removed after the absolute homogeneity of the CRM has been independently established, i.e., the outliers must be confidently deemed to be analytical rather than arising from inhomogeneity of the CRM. ***The standard deviation is then calculated for each analyte from the pooled accepted analyses generated from the certification program.***

Homogeneity Evaluation

For analytes other than gold, the tolerance limits (ISO 16269:2014) shown in Table 1 were determined using an analysis of precision errors method and are considered a conservative estimate of true homogeneity. The meaning of tolerance limits may be illustrated for Cu by 4-acid digestion, where 99 % of the time ($1-\alpha=0.99$) at least 95 % of subsamples ($\rho=0.95$) will have concentrations lying between 31.6 and 35.0 ppm. Put more precisely, this means that if the same number of subsamples were taken and analysed in the same manner repeatedly, 99 % of the tolerance intervals so constructed would cover at least 95 % of the total population, and 1 % of the tolerance intervals would cover less than 95 % of the total population. ***Please note that tolerance limits pertain to the homogeneity of the CRM only and should not be used as control limits for laboratory performance.***

The homogeneity of gold has been determined by INAA at ANSTO using the reduced analytical subsample method which utilises the known relationship between standard deviation and analytical subsample weight (Ingamells and Switzer, 1973 [2]). In this approach the sample aliquot is substantially reduced to a point where most of the variability in replicate assays should be due to inhomogeneity of the reference material and measurement error becomes negligible. Table 5 below shows the gold INAA data determined on 20 x 85 mg subsamples of OREAS 282b. An equivalent scaled version of the results is also provided to demonstrate an appreciation of what this data means if 30 g fire assays were undertaken without the normal measurement error associated with this methodology. In this instance, the 1RSD of 0.07 % calculated for a 30 g fire assay sample (1.28 % at 85 mg weights) confirms the high level of gold homogeneity in OREAS 282b.

The homogeneity of OREAS 282b has also been evaluated in an Analysis of Variance (**ANOVA**) of the INAA data. The 20 samples were comprised of paired samples from each of 10 sampling lot intervals (representative of the prepared batch) and were randomised prior to assigning sample numbers. The duplicate samples enabled an ANOVA by comparison of within- and between-unit variances across the 10 pairs. The purpose of the ANOVA is to test that no statistically significant difference exists in the variance between

units to that of the variance within units. This allows an assessment of homogeneity across the entire prepared batch of OREAS 282b. The test was performed using the following parameters:

- Gold INAA – 20 results (1 laboratory providing duplicate analyses on 10 samples where each sample can be viewed as a ‘unit’);
- Null Hypothesis, H_0 : Between-unit variance is no greater than within-unit variance (reject H_0 if p -value < 0.05);
- Alternative Hypothesis, H_1 : Between-unit variance is greater than within-unit variance.

Table 5. Neutron Activation Analysis of Au (in ppm) on 20 x 85 mg subsamples and showing the equivalent results scaled to a 30 g sample mass typical of fire assay determination.

Replicate No	Au 85 mg actual	Au 30 g equivalent*
1	15.60	15.92
2	16.05	15.94
3	16.10	15.94
4	16.06	15.94
5	15.95	15.93
6	16.08	15.94
7	16.18	15.95
8	15.64	15.92
9	15.75	15.92
10	15.66	15.92
11	16.06	15.94
12	15.80	15.93
13	16.09	15.94
14	15.73	15.92
15	16.08	15.94
16	15.89	15.93
17	16.36	15.96
18	15.82	15.93
19	16.01	15.94
20	15.77	15.92
Mean	15.93	15.93
Median	15.98	15.94
Std Dev.	0.204	0.011
Rel.Std.Dev.	1.28%	0.07%

*Results calculated for a 30 g equivalent sample mass using the formula: $x^{30g\ Eq} = \frac{(x^{INAA} - \bar{X}) \times RSD@30g}{RSD@85mg} + \bar{X}$

where $x^{30g\ Eq}$ = equivalent result calculated for a 30 g sample mass

(x^{INAA}) = raw INAA result at 85 mg

\bar{X} = mean of 85 mg INAA results

The data were not filtered for outliers before p -value calculation, which yielded 0.88—statistically insignificant, so the Null Hypothesis is accepted. ANOVA does not measure absolute homogeneity; it evaluates whether analytes are similarly distributed across the packaging run and whether variance between subsamples from the same unit differs from that between separate units. A reference material may show poor absolute homogeneity yet still meet a relative homogeneity (ANOVA) criterion if within-unit heterogeneity is substantial and consistent. Based on ANOVA and interlaboratory certification results, OREAS 282b is fit-for-purpose as a certified reference material (see ‘Intended Use’ below).

PERFORMANCE GATES

Table 6 below shows intervals calculated for two and three standard deviations. As a guide these intervals may be regarded as warning or rejection for multiple 2SD outliers, or rejection for individual 3SD outliers in QC monitoring, although their precise application should be at the discretion of the QC manager concerned (also see 'Intended Use' section below). Westgard Rules extend the basics of single-rule QC monitoring using multi-rules (for more information visit www.westgard.com/mltrule.htm). A second method utilises a 5 % window calculated directly from the certified value.

Standard deviation is also shown in relative percent for one, two and three relative standard deviations (1RSD, 2RSD and 3RSD) to facilitate an appreciation of the magnitude of these numbers and a comparison with the 5 % window. Caution should be exercised when concentration levels approach lower limits of detection of the analytical methods employed as performance gates calculated from standard deviations tend to be excessively wide whereas those determined by the 5 % method are too narrow. One approach used at commercial laboratories is to set the acceptance criteria at twice the detection level ($DL \pm 10\%$).

i.e., Certified Value $\pm 10\% \pm 2DL$ [1].

Table 6. Performance Gates for OREAS 282b.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5 % window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Pb Fire Assay											
Au, ppm	15.02	0.424	14.17	15.86	13.75	16.29	2.82%	5.64%	8.47%	14.27	15.77
Bi Fire Assay											
Au, ppm	15.17	0.281	14.61	15.74	14.33	16.02	1.86%	3.71%	5.57%	14.41	15.93
PhotonAssay™ (recommended gross mass 445-475 g)											
Au, ppm	15.36	0.271	14.82	15.90	14.55	16.17	1.76%	3.53%	5.29%	14.59	16.13
Infrared Combustion											
C, wt.%	2.00	0.046	1.91	2.10	1.86	2.14	2.31%	4.62%	6.92%	1.90	2.10
S, wt.%	2.23	0.066	2.10	2.36	2.03	2.43	2.98%	5.95%	8.93%	2.12	2.34
4-Acid Digestion											
Ag, ppm	2.35	0.190	1.97	2.73	1.78	2.92	8.09%	16.17%	24.26%	2.23	2.47
Al, wt.%	3.24	0.089	3.06	3.42	2.98	3.51	2.73%	5.46%	8.20%	3.08	3.40
As, wt.%	0.507	0.025	0.456	0.558	0.431	0.583	5.01%	10.03%	15.04%	0.481	0.532
Be, ppm	0.77	0.050	0.67	0.87	0.62	0.92	6.51%	13.02%	19.52%	0.73	0.81
Bi, ppm	0.33	0.019	0.29	0.37	0.27	0.39	5.74%	11.47%	17.21%	0.31	0.35
Ca, wt.%	3.15	0.101	2.95	3.35	2.85	3.45	3.21%	6.43%	9.64%	2.99	3.31
Cd, ppm	1.85	0.112	1.62	2.07	1.51	2.18	6.05%	12.09%	18.14%	1.76	1.94
Ce, ppm	38.1	1.72	34.6	41.5	32.9	43.2	4.51%	9.02%	13.53%	36.2	40.0
Co, ppm	6.47	0.484	5.50	7.44	5.02	7.92	7.48%	14.97%	22.45%	6.15	6.79
Cr, ppm	54	6	43	65	37	71	10.52%	21.03%	31.55%	51	57
Cs, ppm	6.22	0.238	5.75	6.70	5.51	6.94	3.83%	7.65%	11.48%	5.91	6.53
Cu, ppm	33.3	1.97	29.4	37.2	27.4	39.2	5.92%	11.84%	17.76%	31.6	35.0
Dy, ppm	2.20	0.145	1.91	2.49	1.77	2.63	6.58%	13.15%	19.73%	2.09	2.31
Er, ppm	1.21	0.114	0.98	1.43	0.86	1.55	9.45%	18.91%	28.36%	1.15	1.27

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt.% (weight per cent) \equiv % (mass fraction).

Note 1: intervals may appear asymmetric due to rounding; IND = indeterminate.

Note 2: the number of decimal places quoted does not imply accuracy of the certified value to this level but are given to minimise rounding errors when calculating 2SD and 3SD windows.

Table 6 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5 % window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
4-Acid Digestion continued											
Eu, ppm	0.75	0.12	0.51	0.99	0.40	1.10	15.71%	31.43%	47.14%	0.71	0.79
Fe, wt.%	2.44	0.078	2.29	2.60	2.21	2.68	3.20%	6.41%	9.61%	2.32	2.56
Ga, ppm	8.60	0.320	7.96	9.24	7.64	9.56	3.72%	7.44%	11.16%	8.17	9.03
Gd, ppm	2.72	0.151	2.42	3.02	2.27	3.17	5.54%	11.07%	16.61%	2.58	2.85
Hf, ppm	1.44	0.091	1.25	1.62	1.16	1.71	6.36%	12.73%	19.09%	1.36	1.51
Ho, ppm	0.42	0.015	0.39	0.45	0.38	0.47	3.60%	7.20%	10.80%	0.40	0.44
In, ppm	0.052	0.007	0.038	0.067	0.031	0.074	13.62%	27.24%	40.87%	0.050	0.055
K, wt.%	1.11	0.039	1.03	1.19	0.99	1.22	3.54%	7.08%	10.62%	1.05	1.16
La, ppm	21.7	1.22	19.2	24.1	18.0	25.3	5.61%	11.22%	16.84%	20.6	22.8
Li, ppm	32.5	1.50	29.5	35.5	28.0	37.0	4.62%	9.24%	13.86%	30.9	34.1
Lu, ppm	0.16	0.010	0.14	0.18	0.13	0.19	6.25%	12.49%	18.74%	0.16	0.17
Mg, wt.%	0.919	0.024	0.871	0.966	0.848	0.990	2.58%	5.16%	7.74%	0.873	0.965
Mn, wt.%	0.016	0.000	0.015	0.017	0.014	0.017	3.10%	6.21%	9.31%	0.015	0.017
Mo, ppm	21.4	0.76	19.9	22.9	19.1	23.7	3.54%	7.08%	10.61%	20.4	22.5
Na, wt.%	0.031	0.004	0.022	0.039	0.018	0.043	13.50%	26.99%	40.49%	0.029	0.032
Nb, ppm	8.59	0.533	7.53	9.66	7.00	10.19	6.20%	12.40%	18.60%	8.16	9.02
Nd, ppm	18.0	0.49	17.0	19.0	16.5	19.5	2.73%	5.46%	8.19%	17.1	18.9
Ni, ppm	41.4	1.87	37.6	45.1	35.7	47.0	4.52%	9.04%	13.56%	39.3	43.4
P, wt.%	0.058	0.002	0.054	0.063	0.051	0.065	3.88%	7.77%	11.65%	0.055	0.061
Pb, ppm	18.2	1.01	16.2	20.2	15.2	21.2	5.52%	11.05%	16.57%	17.3	19.1
Pr, ppm	4.84	0.204	4.43	5.25	4.22	5.45	4.23%	8.45%	12.68%	4.59	5.08
Rb, ppm	60	3.0	54	66	51	69	4.97%	9.94%	14.90%	57	63
Re, ppm	0.029	0.003	0.024	0.034	0.021	0.037	8.71%	17.42%	26.13%	0.028	0.030
S, wt.%	2.19	0.060	2.07	2.30	2.01	2.36	2.72%	5.44%	8.17%	2.08	2.30
Sb, ppm	167	6	156	179	150	184	3.44%	6.87%	10.31%	159	175
Sc, ppm	4.76	0.200	4.36	5.16	4.16	5.36	4.21%	8.42%	12.62%	4.52	5.00
Se, ppm	2.41	0.46	1.49	3.32	1.04	3.78	19.00%	37.99%	56.99%	2.29	2.53
Sm, ppm	3.22	0.124	2.98	3.47	2.85	3.60	3.85%	7.70%	11.55%	3.06	3.38
Sn, ppm	2.37	0.157	2.05	2.68	1.90	2.84	6.64%	13.28%	19.92%	2.25	2.49
Sr, ppm	47.8	2.12	43.5	52.0	41.4	54.1	4.44%	8.88%	13.31%	45.4	50.2
Ta, ppm	0.41	0.06	0.29	0.53	0.23	0.59	14.64%	29.28%	43.93%	0.39	0.43
Tb, ppm	0.38	0.028	0.32	0.43	0.29	0.46	7.49%	14.98%	22.47%	0.36	0.40
Te, ppm	1.94	0.148	1.64	2.24	1.50	2.38	7.62%	15.23%	22.85%	1.84	2.04
Th, ppm	5.25	0.459	4.33	6.17	3.87	6.62	8.75%	17.51%	26.26%	4.98	5.51
Ti, wt.%	0.169	0.009	0.152	0.187	0.143	0.196	5.21%	10.42%	15.63%	0.161	0.178
Tl, ppm	45.6	3.15	39.3	51.9	36.2	55.1	6.91%	13.81%	20.72%	43.3	47.9
Tm, ppm	0.16	0.014	0.13	0.19	0.12	0.20	8.67%	17.35%	26.02%	0.15	0.17
U, ppm	5.07	0.255	4.55	5.58	4.30	5.83	5.04%	10.09%	15.13%	4.81	5.32
V, ppm	186	9	167	204	158	213	4.88%	9.76%	14.64%	176	195
W, ppm	63	2.6	58	68	56	71	4.07%	8.14%	12.21%	60	66
Y, ppm	13.5	0.74	12.1	15.0	11.3	15.7	5.43%	10.86%	16.29%	12.9	14.2
Yb, ppm	1.08	0.041	1.00	1.16	0.96	1.20	3.76%	7.52%	11.28%	1.03	1.14
Zn, ppm	170	7	156	184	149	191	4.14%	8.28%	12.41%	162	179

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt.% (weight per cent) \equiv % (mass fraction).

Note 1: intervals may appear asymmetric due to rounding.

Note 2: the number of decimal places quoted does not imply accuracy of the certified value to this level but are given to minimise rounding errors when calculating 2SD and 3SD windows.

Table 6 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5 % window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
4-Acid Digestion continued											
Zr, ppm	49.9	3.14	43.7	56.2	40.5	59.3	6.28%	12.56%	18.84%	47.4	52.4
Aqua Regia Digestion											
Ag, ppm	2.32	0.157	2.01	2.64	1.85	2.80	6.77%	13.53%	20.30%	2.21	2.44
Al, wt.%	0.684	0.060	0.565	0.804	0.505	0.864	8.75%	17.51%	26.26%	0.650	0.719
As, wt.%	0.500	0.020	0.460	0.541	0.439	0.562	4.08%	8.15%	12.23%	0.475	0.525
Au, ppm	5.52	0.60	4.33	6.71	3.73	7.31	10.80%	21.60%	32.39%	5.25	5.80
Be, ppm	0.29	0.03	0.22	0.36	0.19	0.39	11.49%	22.99%	34.48%	0.27	0.30
Bi, ppm	0.30	0.020	0.26	0.34	0.24	0.36	6.70%	13.40%	20.10%	0.29	0.32
Ca, wt.%	3.10	0.157	2.79	3.42	2.63	3.57	5.05%	10.11%	15.16%	2.95	3.26
Cd, ppm	1.85	0.094	1.66	2.03	1.56	2.13	5.08%	10.16%	15.23%	1.75	1.94
Ce, ppm	22.8	1.29	20.2	25.4	18.9	26.7	5.67%	11.33%	17.00%	21.7	24.0
Co, ppm	6.38	0.308	5.76	6.99	5.45	7.30	4.83%	9.66%	14.49%	6.06	6.70
Cr, ppm	25.6	1.89	21.9	29.4	20.0	31.3	7.35%	14.71%	22.06%	24.4	26.9
Cs, ppm	2.74	0.267	2.21	3.27	1.94	3.54	9.75%	19.49%	29.24%	2.60	2.88
Cu, ppm	32.4	1.57	29.3	35.6	27.7	37.1	4.84%	9.67%	14.51%	30.8	34.0
Fe, wt.%	2.37	0.082	2.21	2.53	2.12	2.61	3.45%	6.90%	10.35%	2.25	2.49
Ga, ppm	2.17	0.23	1.72	2.63	1.49	2.85	10.43%	20.87%	31.30%	2.07	2.28
Hf, ppm	0.17	0.02	0.13	0.20	0.11	0.22	11.21%	22.42%	33.64%	0.16	0.17
Hg, ppm	34.5	2.18	30.1	38.8	27.9	41.0	6.32%	12.64%	18.96%	32.8	36.2
In, ppm	0.045	0.004	0.038	0.052	0.034	0.056	8.17%	16.33%	24.50%	0.043	0.047
K, wt.%	0.247	0.018	0.212	0.282	0.194	0.300	7.13%	14.27%	21.40%	0.234	0.259
La, ppm	12.2	0.70	10.8	13.6	10.1	14.3	5.72%	11.43%	17.15%	11.6	12.8
Li, ppm	4.22	0.75	2.72	5.72	1.97	6.47	17.77%	35.53%	53.30%	4.01	4.43
Mg, wt.%	0.813	0.030	0.754	0.873	0.724	0.903	3.65%	7.31%	10.96%	0.773	0.854
Mn, wt.%	0.016	0.001	0.014	0.017	0.014	0.017	3.44%	6.87%	10.31%	0.015	0.016
Mo, ppm	21.1	0.94	19.2	23.0	18.3	23.9	4.44%	8.87%	13.31%	20.1	22.2
Ni, ppm	40.1	2.10	35.9	44.3	33.8	46.4	5.24%	10.48%	15.71%	38.1	42.1
P, wt.%	0.055	0.003	0.050	0.061	0.047	0.064	5.08%	10.16%	15.23%	0.053	0.058
Pb, ppm	17.2	0.93	15.3	19.1	14.4	20.0	5.42%	10.85%	16.27%	16.3	18.1
Rb, ppm	14.1	1.23	11.6	16.5	10.4	17.8	8.74%	17.48%	26.22%	13.4	14.8
Re, ppm	0.028	0.002	0.025	0.032	0.023	0.034	6.39%	12.78%	19.17%	0.027	0.030
S, wt.%	2.20	0.085	2.03	2.36	1.94	2.45	3.85%	7.70%	11.55%	2.09	2.31
Sb, ppm	125	10	105	145	95	155	8.08%	16.17%	24.25%	119	131
Sc, ppm	2.63	0.194	2.24	3.01	2.04	3.21	7.41%	14.81%	22.22%	2.49	2.76
Se, ppm	2.44	0.30	1.84	3.04	1.54	3.34	12.29%	24.58%	36.87%	2.32	2.57
Sn, ppm	1.47	0.113	1.24	1.69	1.13	1.81	7.67%	15.34%	23.01%	1.40	1.54
Sr, ppm	28.8	1.73	25.4	32.3	23.7	34.0	5.99%	11.98%	17.97%	27.4	30.3
Ta, ppm	< 0.01	IND	IND	IND	IND	IND	IND	IND	IND	IND	IND
Tb, ppm	0.30	0.015	0.27	0.33	0.25	0.34	5.04%	10.07%	15.11%	0.28	0.31
Te, ppm	1.89	0.152	1.58	2.19	1.43	2.34	8.05%	16.09%	24.14%	1.79	1.98
Th, ppm	3.72	0.285	3.15	4.29	2.87	4.58	7.66%	15.31%	22.97%	3.53	3.91
Ti, wt.%	< 0.005	IND	IND	IND	IND	IND	IND	IND	IND	IND	IND
Tl, ppm	40.9	2.38	36.1	45.6	33.7	48.0	5.83%	11.67%	17.50%	38.8	42.9

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt.% (weight per cent) \equiv % (mass fraction).

Note 1: intervals may appear asymmetric due to rounding.

Note 2: the number of decimal places quoted does not imply accuracy of the certified value to this level but are given to minimise rounding errors when calculating 2SD and 3SD windows.

Table 6 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5 % window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Aqua Regia Digestion continued											
U, ppm	3.26	0.205	2.85	3.67	2.65	3.88	6.27%	12.55%	18.82%	3.10	3.43
V, ppm	83	9	66	100	57	109	10.38%	20.76%	31.14%	79	87
W, ppm	30.3	2.74	24.8	35.8	22.1	38.5	9.04%	18.08%	27.12%	28.8	31.8
Y, ppm	8.45	0.475	7.50	9.40	7.02	9.88	5.62%	11.24%	16.87%	8.03	8.87
Yb, ppm	0.50	0.018	0.47	0.54	0.45	0.56	3.57%	7.13%	10.70%	0.48	0.53
Zn, ppm	167	6	154	179	148	185	3.69%	7.37%	11.06%	158	175
Zr, ppm	5.72	0.71	4.29	7.14	3.58	7.85	12.43%	24.86%	37.29%	5.43	6.00

SI unit equivalents: ppm (parts per million; 1×10^{-6}) \equiv mg/kg; wt.% (weight per cent) \equiv % (mass fraction).

Note 1: intervals may appear asymmetric due to rounding.

Note 2: the number of decimal places quoted does not imply accuracy of the certified value to this level but are given to minimise rounding errors when calculating 2SD and 3SD windows.

PARTICIPATING LABORATORIES

1. Actlabs, Ancaster, Ontario, Canada
2. AGAT Laboratories, Calgary, Alberta, Canada
3. AGAT Laboratories, Thunder Bay, Ontario, Canada
4. Alex Stewart International, Mendoza, Argentina
5. ALS, Canning Vale, WA, Australia
6. ALS, Johannesburg, South Africa
7. ALS, Kalgoorlie, WA, Australia
8. ALS, Lima, Peru
9. ALS, Loughrea, Galway, Ireland
10. ALS, Malaga, WA, Australia
11. ALS, Thunder Bay, Ontario, Canada
12. ALS, Vancouver, BC, Canada
13. American Assay Laboratories, Sparks, Nevada, USA
14. ANSTO, Lucas Heights, NSW, Australia
15. ARGETEST Mineral Processing, Ankara, Central Anatolia, Turkey
16. Britannia Mining Solutions, Hamilton, Ontario, Canada
17. BUREAU VERITAS AZERI LLC, Baku, Azerbaijan
18. Bureau Veritas Commodities and Trade, Inc., Sparks, Nevada, USA
19. Bureau Veritas Commodities Canada Ltd, Vancouver, BC, Canada
20. Bureau Veritas Geoanalytical, Perth, WA, Australia
21. Bureau Veritas Minerals, Ankara, Central Anatolia, Turkey
22. Bureau Veritas Minerals, Hermosillo, Sonora, Mexico
23. BV Coquimbo Laboratory, Coquimbo, Elqui, Chile
24. CERTIMIN, Lima, Peru

25. CERTIMIN, Trujillo, Peru
26. Geoanalitica, Antofagasta, Chile
27. Inspectorate (BV), Lima, Peru
28. Intertek, Cupang, Muntinlupa, Philippines
29. Intertek, Perth, WA, Australia
30. Intertek Genalysis, Adelaide, SA, Australia
31. Intertek Minerals Ltd, Tarkwa, Western Region, Ghana
32. MSA ENVAL Laboratories, Yamoussoukro, Côte d'Ivoire
33. MSALABS, Bougouni, Bamako, Mali
34. MSALABS, Prince George, BC, Canada
35. MSALABS, Val-d'Or, Quebec, Canada
36. MSALABS, Vancouver, BC, Canada
37. MSALABS Bulyanhulu Gold Mine, Bubada, Shinyanga, United Republic of Tanzania
38. MSALABS Carlin, Carlin, Nevada, USA
39. MSALABS Fairbanks, Fairbanks, Alaska, USA
40. MSALABS Geita, Geita, Geita, United Republic of Tanzania
41. MSALABS Kibali Gold Mines, Doko, Haut-Uélé, Congo, Democratic Republic of the (Zaire)
42. MSALABS Timmins, Timmins, Ontario, Canada
43. Nevada Gold Mines Assay Lab, Carlin, Nevada, USA
44. On Site Laboratory Services, Bendigo, VIC, Australia
45. Paragon Geochemical Laboratories, Sparks, Nevada, USA
46. PT BVI Lab Manado, Kabupaten Minahasa Utara, Sulawesi Utara, Indonesia
47. PT Geoservices Ltd, Cikarang, Jakarta Raya, Indonesia
48. PT Intertek Utama Services, Jakarta Timur, DKI Jakarta, Indonesia
49. Ravenswood Gold, Ravenswood, QLD, Australia
50. Reminex Centre de Recherche, Marrakesh, Marrakesh-Safi, Morocco
51. Rio Tinto Kennecott Copper Central Laboratory, Kennecott, Utah, USA
52. Saskatchewan Research Council, Saskatoon, Saskatchewan, Canada
53. SGS Australia Mineral Services, Kalgoorlie, WA, Australia
54. SGS Canada Inc., Vancouver, BC, Canada
55. SGS del Peru, Lima, Peru
56. SGS Geosol Laboratorios Ltda, Vespasiano, Minas Gerais, Brazil
57. SGS Mwanza, Mwanza, Mwanza, United Republic of Tanzania
58. Shiva Analyticals Ltd, Bangalore North, Karnataka, India
59. UIS Analytical Services, Centurion, South Africa

Please note: To maintain anonymity of participating laboratories, the alphabetical list above does not correspond to the Lab ID numbers shown in the scatter plots below.

Figure 1. Au by Pb Fire Assay in OREAS 282b

SPC.1795.RR1.OREAS 282b.3.Fire Assay.Au.Lab.251020.112110.SS


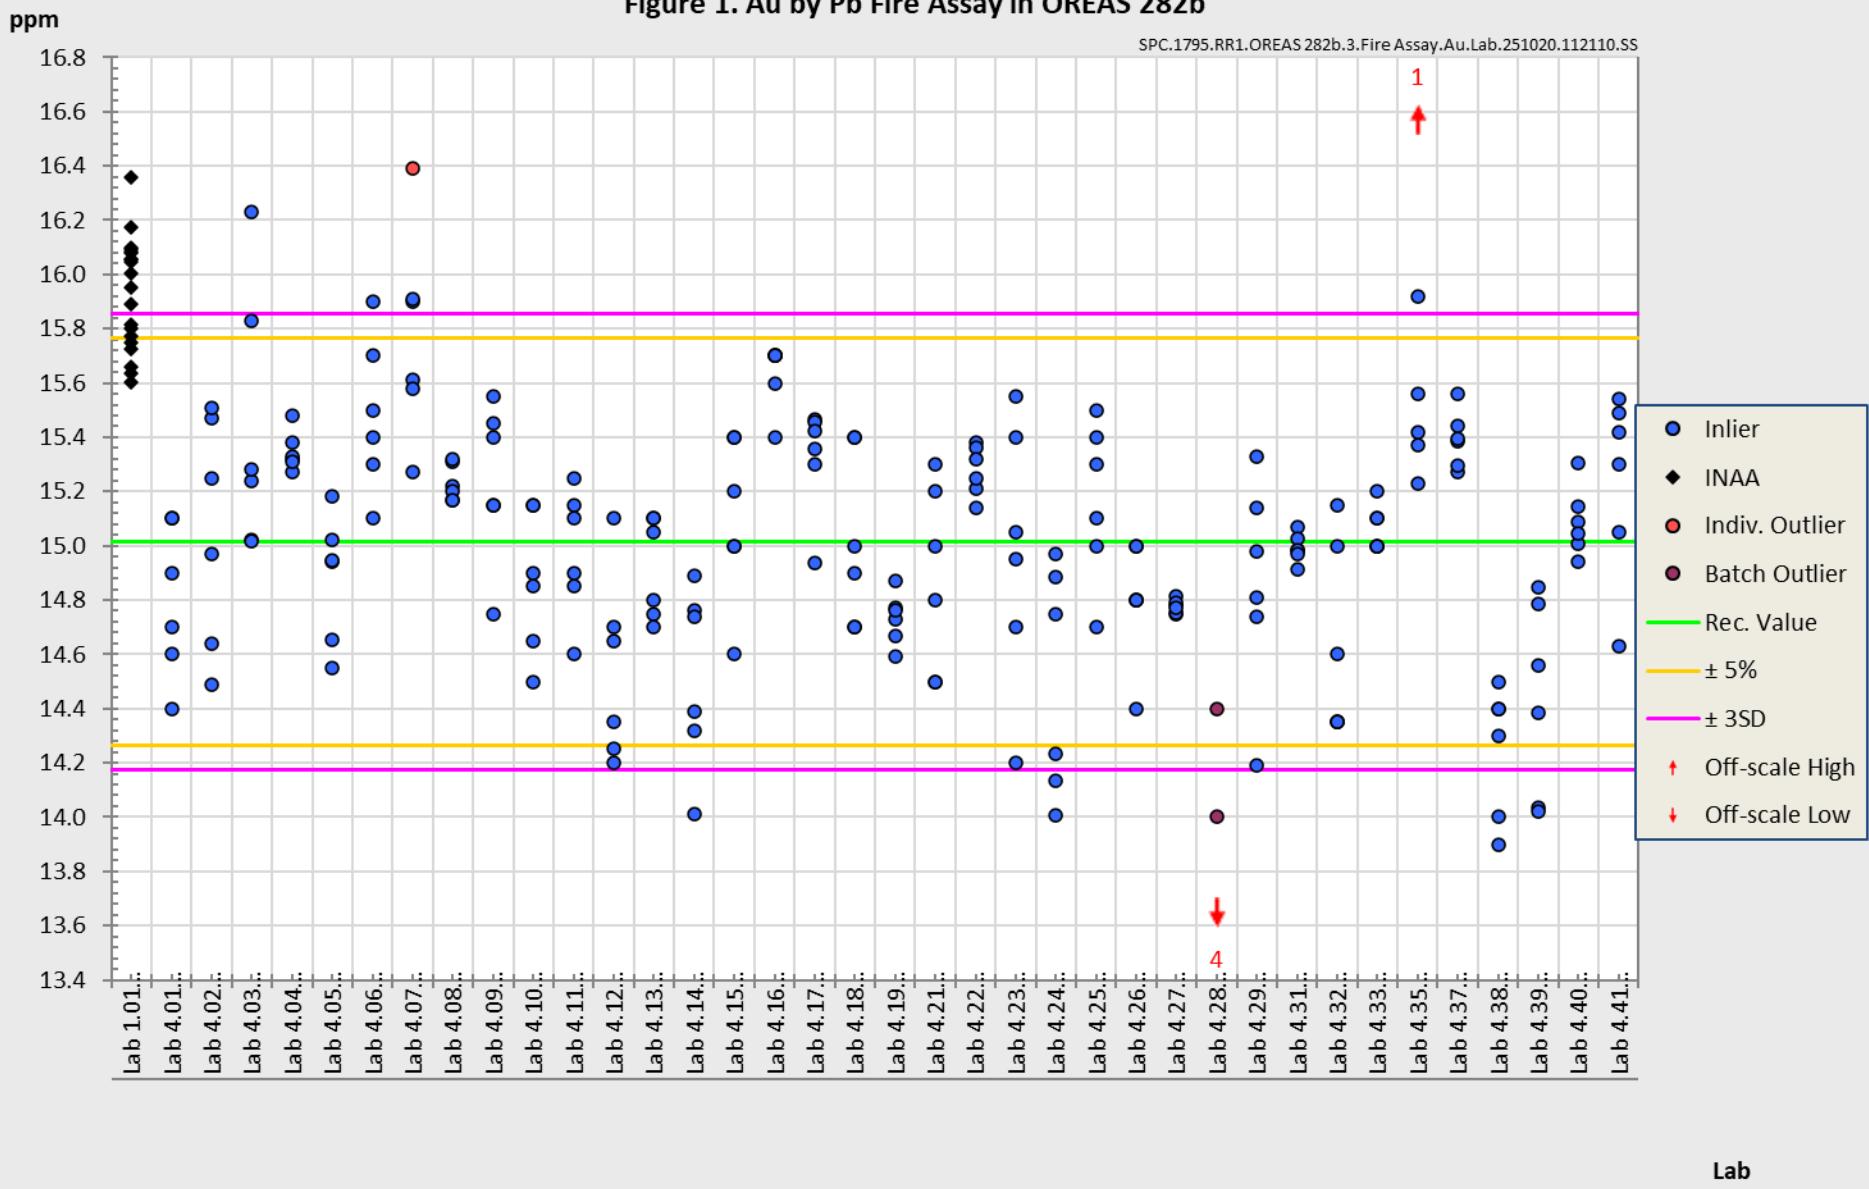


Figure 2. Au by PhotonAssay in OREAS 282b

SPC.1795.RR1.OREAS 282b.4.PA.Au.Lab.251020.112202.SN

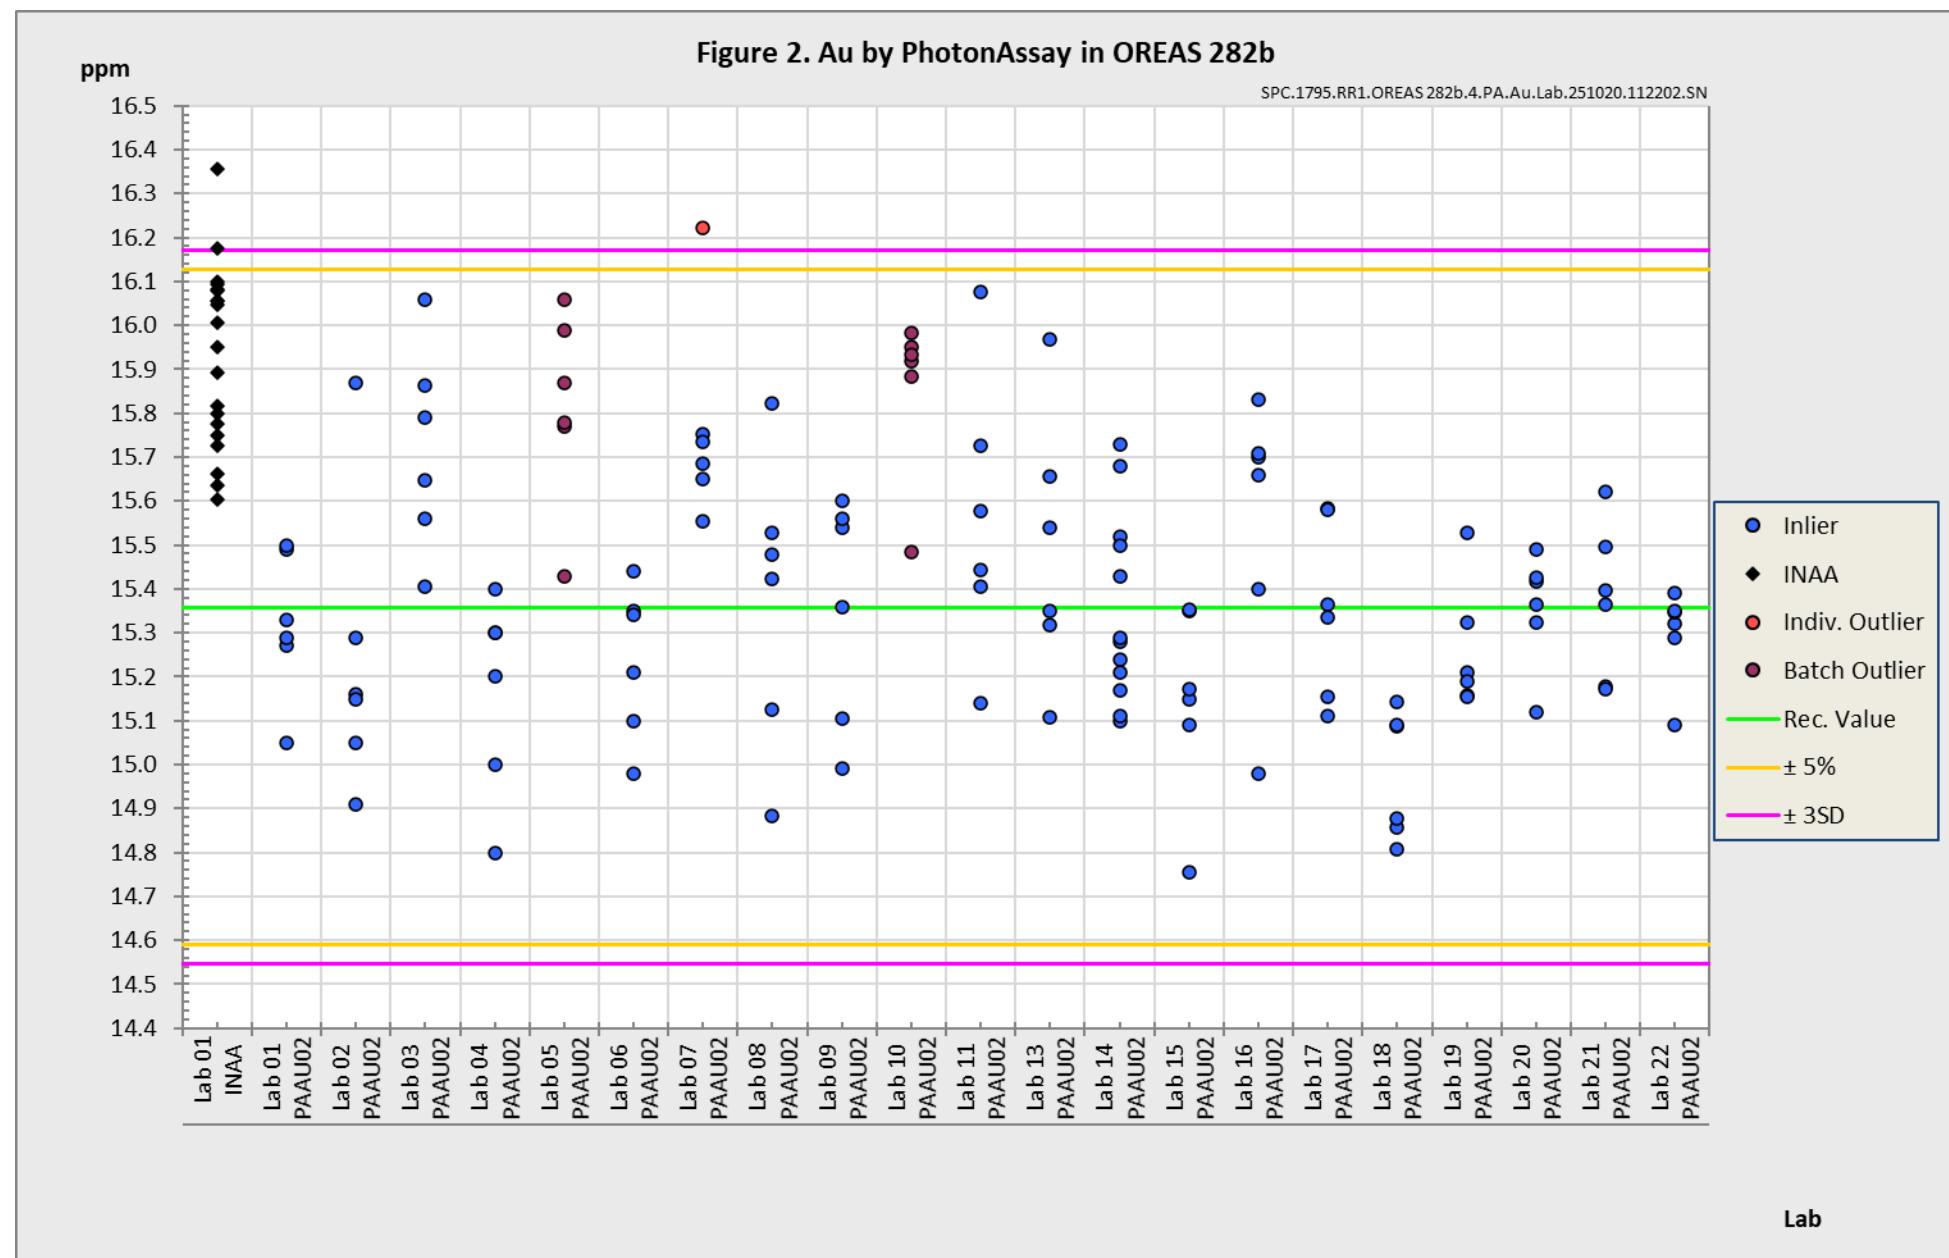

PREPARER AND SUPPLIER

Certified reference material OREAS 282b is prepared, certified and supplied by:

ORE Research & Exploration Pty Ltd Tel: +613-9729 0333
37A Hosie Street Web: www.oreas.com
Bayswater North VIC 3153 Email: info@ore.com.au
AUSTRALIA

METROLOGICAL TRACEABILITY

The interlaboratory results that underpin the certified values are metrologically traceable to the international measurement scale (SI) of mass (either as a % mass fraction or as milligrams per kilogram (mg/kg)) [14]. In line with popular use, all data within tables in this certificate are expressed as the mass fraction in either weight percent (wt.%) or parts per million (ppm).

The analytical samples sent to participating laboratories were selected in a manner to be representative of the entire prepared batch of CRM. This representativeness was maintained in each submitted laboratory sample batch and ensures the user that the data is traceable from sample selection through to the analytical results. The systematic sampling method was chosen due to the low risk of overlooking repetitive effects or trends in the batch due to the way the CRM was processed. In line with ISO 17025 [8], each analytical data set received from the participating laboratories has been validated by its assayer through the inclusion of internal reference materials and QC checks during and post analysis.

Participating laboratories were selected based on demonstrated analytical competence, including prior performance in interlaboratory comparison programs conducted by ORE Pty Ltd, with consideration given to their expertise in relevant analytical methods, measurands, and sample matrices. For the measurands reported in this certificate (Table 1), data were sourced from laboratories accredited to ISO/IEC 17025. Where formal accreditation was not held for specific operationally defined measurands, metrological traceability was verified through the use of well-characterised, independently certified reference materials (CRMs) included as control samples in the round robin study.

In accordance with ISO 33405:2024-05 [5], clause 9.2.5, and ISO 17034:2016 [9], clause 7.12.4 b), the use of such control samples provides an acceptable means of demonstrating traceability in the absence of formal accreditation. In this certification program, traceability was further supported by the agreement of measured values for control samples with their known certified values, thereby offering additional confidence in the calibration and validity of measurement results across participating laboratories.

Operationally Defined Measurands

In accordance with ISO 33405:2024-05, Clause 9.2.4, measurands (analytes) may be certified as operationally defined. For these measurands, traceability to the SI may not be achievable because the analytical procedure involves sample transformations (e.g., leaching or extraction). While instrument calibration can be traceable to appropriate units, the transformation steps themselves are not directly traceable and can only be evaluated through reference comparisons or harmonized procedures.

Accordingly, characterisation of these measurands has been based on the concordance of results obtained from multiple laboratories using a common, well-defined procedure. This approach ensures fitness-for-purpose and fulfils the requirements for metrological traceability as specified in ISO 17034 and ISO 33405 for operationally defined measurands.

COMMUTABILITY

The certified values reported herein are derived from measurements performed using analytical methods involving sample pre-treatment steps, such as fusion or acid digestion. These processes convert the sample matrix into a chemically simplified and stable form, facilitating calibration traceable to primary standards via solution-based calibration protocols. Due to the established robustness and effectiveness of these pre-treatment methods, issues related to commutability are not expected to impact the suitability of this Certified Reference Material (CRM) for its intended use.

OREAS CRMs are prepared from natural ore materials, ensuring the presence of matrix and mineralogical characteristics representative of typical exploration, mine and process samples. Consistent with ISO 17034:2016 and ISO Guide 30, users are advised to select CRMs with matrix and mineralisation styles closely matching those of their routine samples to minimize matrix effects and enhance analytical comparability. Detailed descriptions of the CRM's source material and mineralogical characteristics are provided in the 'Source Material' section to guide appropriate CRM selection.

INTENDED USE

OREAS 282b is intended to cover all activities needed to produce a measurement result. This includes extraction, possible separation steps and the actual measurement process (the signal producing step). OREAS 282b may be used to calibrate the entire procedure by producing a pure substance CRM transformed into a calibration solution.

OREAS 282b is intended for the following uses:

- For the monitoring of laboratory performance in the analysis of analytes reported in Table 1 in geological samples;
- For the verification/ validation of analytical methods for analytes reported in Table 1;
- For the calibration of instruments used in the determination of the concentration of analytes reported in Table 1. When a value provided in this certificate is used to calibrate a measurement process, the uncertainty associated with that value should be appropriately propagated into the user's uncertainty calculation. Users can determine an approximation of the standard uncertainty by calculating one fourth of the width of the Expanded Uncertainty interval given in this certificate (Expanded Uncertainty intervals are provided in Tables 1).

MINIMUM SAMPLE SIZE

To relate analytical determinations to the values in this certificate, the minimum mass of sample used should match the typical mass that the laboratories used in the interlaboratory (round robin) certification program. This means that different minimum sample masses should be used depending on the operationally defined methodology as follows:

- Au by lead collection fire assay: ≥ 25 g;
- Au by bismuth collection fire assay: ≥ 30 g;
- Au by PhotonAssay™ *recommended gross fill mass: 445-475 g;
- C and S by infrared combustion furnace/CS analyser: ≥ 0.1 g;
- 4-acid digestion with ICP-OES and/or MS finish: ≥ 0.25 g;
- Aqua regia digestion with ICP-OES and/or MS finish: ≥ 0.5 g.

**Recommended gross fill mass refers to the mass of the entire jar assembly, including jar base, lid, and contents. This fill range was developed using a ~40g empty jar but should be achievable for any jar-lid combination*

PERIOD OF VALIDITY & STORAGE INSTRUCTIONS

The certification of OREAS 282b remains valid, within the specified measurement uncertainties, until at least April 2040, provided the CRM is handled and stored in accordance with the instructions given below. This certification is nullified if the CRM is any way changed or contaminated.

Store in a clean and cool dry place away from direct sunlight.

Long-term stability will be monitored at appropriate intervals and purchasers notified if any changes are observed. The period of validity may well be indefinite and will be reassessed prior to expiry with the aim of extending the validity if possible.

Single-use sachets

OREAS 282b is available in single-use, 60 g laminated foil sachets. Following analysis, it is the manufacturer's expectation that any remaining material is discarded. It is the user's responsibility to prevent contamination and avoid prolonged exposure of the sample to the atmosphere prior to analysis.

INSTRUCTIONS FOR HANDLING & CORRECT USE

Fine powders pose a risk to eyes and lungs and therefore standard precautions including the use of safety glasses and dust masks are advised.

Pre-homogenisation of the CRM prior to subsampling and analysis is not necessary as there is no particle segregation under transport [12].

All certified values contained within this report refer to the concentration levels in the packaged state. There is no need for drying prior to weighing and analysis.

Authoritative Source of Information

This Certificate of Analysis constitutes the primary and authoritative document for the certified values, associated expanded uncertainties, and their correct use. While the accompanying DataPack provides supporting information, including raw data and uncertainty estimates with additional significant figures, these extended figures are provided solely for transparency, convenience and statistical reference. Users must rely exclusively on the values stated in this Certificate, rounded to an appropriate number of significant figures, for all metrological and analytical purposes. Any discrepancy between values

presented in the DataPack and those in this Certificate shall be resolved in favour of the information provided herein.

QC monitoring using multiples of the Standard Deviation (SD)

In the application of SD's in monitoring performance it is important to note that not all laboratories function at the same level of proficiency and that different methods in use at a particular laboratory have differing levels of precision. Each laboratory has its own inherent SD (for a specific concentration level and analyte-method pair) based on the analytical process and this SD is not directly related to the round robin program.

The majority of data generated in the round robin program was produced by a selection of world class laboratories. The SD's thus generated are more constrained than those that would be produced across a randomly selected group of laboratories. To produce more generally achievable SD's the 'pooled' SD's provided in this report include interlaboratory bias. This 'one size fits all' approach may require revision at the discretion of the QC manager concerned following careful scrutiny of QC control charts.

The performance gates shown in Table 6 are intended only to be used as a preliminary guide as to what a laboratory may be able to achieve. Over a period of time monitoring your own laboratory's data for this CRM, SD's should be calculated directly from your own laboratory's process. This will enable you to establish more specific performance gates that are fit for purpose for your application as well as the ability to monitor bias. If your long-term trend analysis shows an average value that is within the 95 % expanded uncertainty then generally there is no cause for concern in regard to bias.

For use with the aqua regia digestion method

It is important to note that in the analytical industry there is no standardisation of the aqua regia digestion process. This method is a partial empirical digest and differences in recoveries for various analytes are commonplace. These are caused by variations in the digest conditions and can include the ratio of nitric to hydrochloric acids, acid strength, temperatures, leach times and secondary digestions. Recoveries for sulphide-hosted base metal sulphides approach total values, however, other analytes, in particular the lithophile elements, show greater sensitivity to method parameters. This can result in lack of consensus in an inter-laboratory certification program for these elements.

The approach applied here is to report certified values in those instances where reasonable agreement exists amongst a majority of participating laboratories. The results of specific laboratories may differ significantly from the certified values, but will, nonetheless, be valid and reproducible in the context of the specifics of the aqua regia method in use. Users of this reference material should, therefore, be mindful of this limitation when applying the certified values in a quality control program.

LEGAL NOTICE

Ore Research & Exploration Pty Ltd has prepared and statistically evaluated the property values of this reference material to the best of its ability. The Purchaser by receipt hereof releases and indemnifies Ore Research & Exploration Pty Ltd from and against all liability and costs arising from the use of this material and information.

**© COPYRIGHT Ore Research & Exploration Pty Ltd.
Unauthorised copying, reproduction, storage or dissemination is prohibited.**

DOCUMENT HISTORY

Revision No.	Date	Changes applied
0	7 th November, 2025	First publication.

CERTIFYING OFFICER

Craig Hamlyn (B.Sc. Hons - Geology), Technical Manager - ORE P/L

QMS CERTIFICATION

ORE Pty Ltd is accredited for compliance with ISO 17034:2016 (Accreditation number 20483).



ORE Pty Ltd is ISO 9001:2015 certified by Lloyd's Register Quality Assurance Ltd for its quality management system including development, manufacturing, certification and supply of CRMs.



REFERENCES

- [1] Govett, G.J.S. (1983). Handbook of Exploration Geochemistry, Volume 2: Statistics and Data Analysis in Geochemical Prospecting (Variations of accuracy and precision).
- [2] Ingamells, C. O. and Switzer, P. (1973). A Proposed Sampling Constant for Use in Geochemical Analysis, *Talanta* 20, 547-568.
- [3] ISO Guide 30:2015. Terms and definitions used in connection with reference materials.
- [4] ISO 33401:2024-01. Reference materials – Contents of certificates, labels and accompanying documentation.
- [5] ISO 33405:2024-05. Reference materials – Approaches for characterization and assessment of homogeneity and stability.
- [6] ISO Guide 98-3:2008. Guide to the expression of uncertainty in measurement (GUM:1995).
- [7] ISO 16269:2014. Statistical interpretation of data – Part 6: Determination of statistical tolerance intervals.
- [8] ISO 17025:2017, General requirements for the competence of testing and calibration laboratories.

- [9] ISO 17034:2016. General requirements for the competence of reference material producers.
- [10] Munsell Rock Color Book (2014). Rock-Color Chart Committee, Geological Society of America (GSA), Minnesota (USA).
- [11] OREAS-BUP-70-09-11: Statistical Analysis - OREAS Evaluation Method.
- [12] OREAS-TN-04-1498: Stability under transport; an experimental study of OREAS CRMs.
- [13] OREAS-TN-05-1674: Long-term storage stability; an experimental study of OREAS CRMs.
- [14] Thompson, A.; Taylor, B.N. (2008); Guide for the Use of the International System of Units (SI); NIST Special Publication 811; U.S. Government Printing Office: Washington, DC; available at: <https://physics.nist.gov/cuu/pdf/sp811.pdf> (accessed Nov 2021).
- [15] Van der Veen A.M.H. et al. (2001). Uncertainty calculations in the certification of reference materials, *Accred Qual Assur* 6: 290-294.